

507/513 Di-Monopole Hybrid Log-Periodic Antennas

Vertical dipole log periodics offer the advantages of gain, substantial power handling capability, and no complicated ground screen for impedance matching. Unfortunately, to serve lower frequencies, large tower heights are required, since the tower must be somewhat larger than a half wavelength at the lowest operating frequency.

Monopole log-periodic antennas, on the other hand, are smaller in the vertical dimension. This reduced height is a structural advantage, and an operational benefit in severe environments and near airports. However, monopole log-periodic antennas provide less gain and require, in general, a complicated and expensive-to-install ground screen.

Model 507 and 513 Di-Monopole Antennas represent a new class of improved log-periodic antennas, which capitalize on the advantages of each of the older classes of verticals and largely circumvent their limitations.

Combine the advantages of vertical dipoles and monopoles.

The front part of the Di-Monopole array is essentially identical to the TCI 503 vertical transposed dipole log-periodic antenna. In the center portion of the array a transition gradually begins toward dipoles, with their lower portions physically foreshortened. At the lowest frequency, the antenna's performance resembles that of a monopole array, but with a balanced feed. At mid-band and above, the full performance of a dipole array is achieved. Because the ground screen necessary to support the impedance of the antenna is required for the lower frequencies only, the necessity of a fine mesh ground screen, which is complicated and expensive to install, is avoided. No ground screen is needed to support the impedance of the high-frequency elements.

This class of antenna was designed utilizing TCI's unique Linear Wire Antenna Program, which optimized various design parameters to eliminate residual common mode and to maximize the

performance and bandwidth for a given-size structure. The antenna has been built, fully tested and proven, and is now in production and operational use.

KEY FEATURES

- › Highest gain, broadest bandwidth for a given tower height
- › Combines low tower height of monopole for low-frequency operation with the gain of a dipole log periodic at higher frequencies
- › Minimal ground screen requirements
- › Full 2–30 MHz coverage



Model 507-1 Specifications

Polarization	Vertical
Directive Gain	6.6 dB at 2.0
Relative to Isotropic	<ul style="list-style-type: none"> • 9.2 dB at 2.3 • 10 dB at 7 MHz • 12 dB at 13 MHz and above
Nominal Azimuth	160° at 2 MHz
Plane Beamwidth between Half Power Points	<ul style="list-style-type: none"> • 140° at 7 MHz • 120° at 12 MHz and above
Front-to-back Ratio	<ul style="list-style-type: none"> • 8.6 dB at 2.3 MHz • 15 dB at 7 MHz and above
VSWR	2.0:1 maximum
Environment Performance	Designed in accordance with EIA Specification RS-222C for loading of 225 km/h (140 mi/h) wind, no ice, 145 km/h (90 mi/h) wind, 12 mm (1/2") radial ice


Model 513 Specifications

Polarization	Vertical
Directive Gain	9 dB at fo
Relative to Isotropic	<ul style="list-style-type: none"> • 10 dB at 7 MHz • 12 dB at 13 MHz and above
Nominal Azimuth	140° at fo
Plane Beamwidth between Half Power Points	120° at 12 MHz and above
Front-to-back Ratio	<ul style="list-style-type: none"> • 10 dB at fo • 15 dB at 7 MHz and above
VSWR	2.0:1 maximum
Environment Performance	Designed in accordance with EIA Specification RS-222C for loading of 225 km/h (140 mi/h) wind, no ice, 145 km/h (90 mi/h) wind, 12 mm (1/2") radial ice


TCI INTERNATIONAL, INC.
3541 Gateway Blvd.
Fremont, CA 94538-6585 USA

TEL: 1-510-687-6100
USA: 1-800-824-8074
FAX: 1-510-687-6101
www.tcibr.com

✓ **ELEVATION PLANE PATTERN** Origin of pattern plot is -5dB relative to an isotrope TCI Model 507 and 513 (top) at 2 MHz (bottom) at 15 MHz

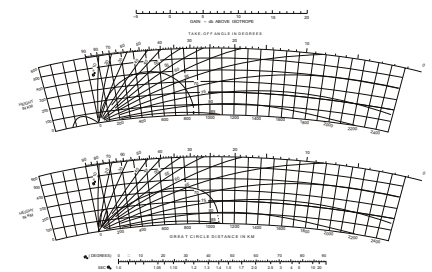

✓ **NOTE:** Front support poles, normally class 2, 3, or 4 Douglas Fir, are required but not supplied by TCI. Check with TCI for specific requirements.

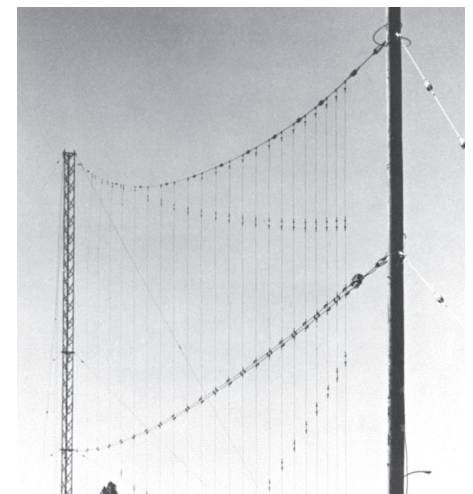

Company proprietary

Data and specifications subject to change without notification
Not for distribution without prior permission from TCI.
507-08-14-12

©2004-2012 TCI—All Rights Reserved

Size and Frequency Coverage

Model Number	Frequency Range	Height		Length*		Width*	
		ft.	mtr.	ft.	mtr.	ft.	mtr.
507-1-N	2-30 MHz	140	43	600	183	600	183
507-2-N	3-30 MHz	100	31	440	135	440	135
513-1-N	2-30 MHz	127	39	390	119	175	53
513-2-N	2.8-30 MHz	100	31	313	96	156	48
513-3-N	4.5-30 MHz	82	25	265	81	140	43

* Measured from extreme guy points

Power and Impedance Data

Model Number	Input Impedance	Power	Connector
507-N-02	50 Ω coaxial	Receiving	Type N Female
507-N-03	50 Ω coaxial	10 kW Avg./50 kW PEP	1-5/8" EIA Female
513-N-02	50 Ω coaxial	Receiving	Type N Female
513-N-03	50 Ω coaxial	10 kW Avg. 50 kW PEP	1-5/8" EIA Female

